

Audi TT 8n Door Handles Installation Instructions




There's a very detailed video on how to remove the door card/panel.

To continue with the tutorial starting after the video, continue on Page 3.

Watch here:

[YouTube Audi TT Mk1 Door Panel Removal](#)

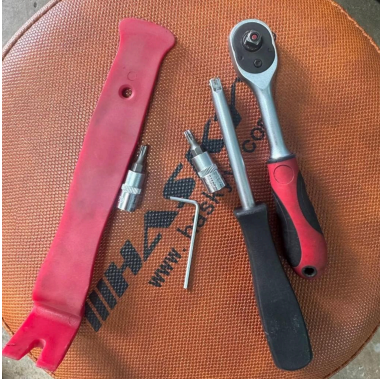


Tools needed:

- T27 torx bit
- T20 torx bit
- Small ratchet or similar
- 2.5mm allen key
- Small allen key



Locate the small hole underneath the aluminium circle.

Use the small allen key to push in a locking pin inside the cover.

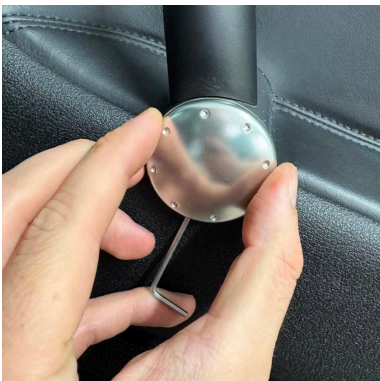

While pushing the allen key, turn the aluminium cap counter-clockwise to then remove outwards.



Remove the screw seen in the picture with the T27 torx bit.



Gently remove the rubber flaps from bottom to top.

We only need to unbutton the area that connects to the door card, there's no need to remove it entirely.




Gently pull the whole door card upwards. It should release from the door after pulling up for 5cm.

You can keep the door card sitting on the door by using the bottom clips.

You can replace the whole door handle by simply tilting the door card against you.



Unclip the door puller cable from the door itself and then remove the hook from the door handle mechanism.

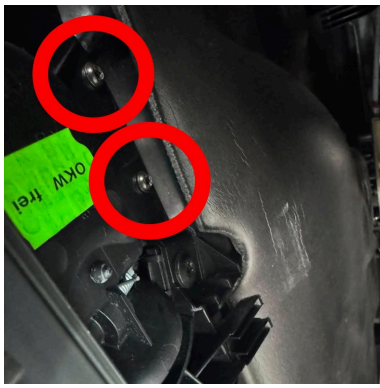


Unscrew the two circled screws with a T20 torx bit.

Then remove the securing clip by pushing it towards the front of the car.




Push the whole door handle assembly from the bottom part by angling it as shown in the picture.

Then remove the door handle completely.

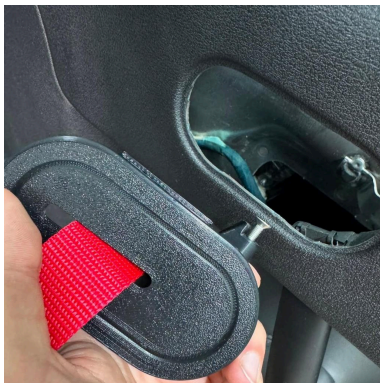


Use the door handle marked with the correct side.

Unscrew the screw shown in the picture by a few turns.

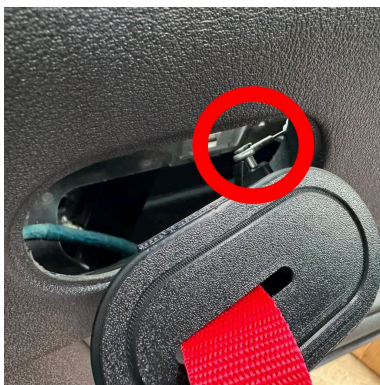

Attach the door puller cable hook to the screw and screw it back in until the hook is secured in place, but without putting too much pressure in it.

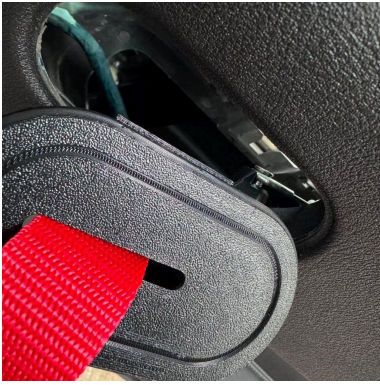

Slide the whole assembly into the door card.

Make sure to align the top edge first and then push it from underneath until it fits in place.



Done!