

Twingo 2 & 3 Door handle installation instructions



Locate the small round cover for the main bolt. Use a small pick or flat screwdriver to pull out the cover.



Use a Torx 30 screwdriver to remove the bolt from the door handle.





Pull out the door handle a few centimeters and twist it down to then remove the handle mechanism.



Use a small flat screwdriver to pinch the pin on the mechanism cover and pull down on the handle.

The mechanism should pop out after a few wiggles.

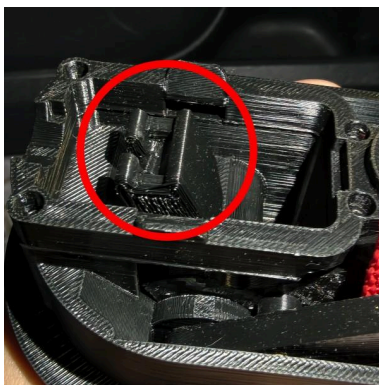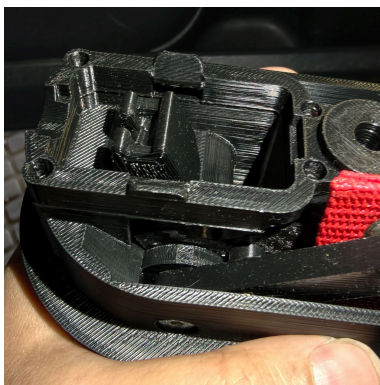

VERY IMPORTANT!!!

Make sure the new door handle is completely retracted back before installing the mechanism back.

With your finger, push back this lever all the way back.

Should match the position of the picture.




Align the mechanism and push down until it clicks in place. Might require a little bit of force.



To attach the new door handle back in place, consider the small triangular pin on the back of the door handle.

First you need to align the back part past the triangular pin at an angle and push down to its place.

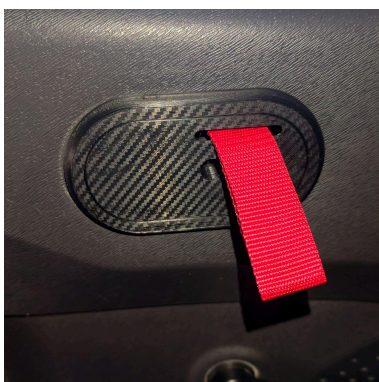

Use the newly provided bolt to attach the new door handle in place.

To align the bolt properly, move the door handle a little bit back and forth until the bolt falls in place.



Test your newly installed door handle.